PRODUCTS

Framery One

The connected one



Framery One, our first digital soundproof pod. Framery One is not only stylish and super smart, it incorporates the latest technology, leading sound insulation standards and echo-free acoustics. You can look forward to a highly adaptable workspace where you won't be disturbed by outside noise or distractions and can enjoy best-in-class design while you focus on your next project.







Stepping into the pod, Framery One's occupancy light will display a red light with **360**° **visibility** to let the office know the pod is in use. Using the **pod's touch-screen**, the user is able to adjust the airflow and brightness of the lights according to his/her own preferences. With Framery One's integrated 4G module, the user will always stay connected. **Calendar integration** allows reservations for the pod from the user's laptop. **Seamless connection** between the pod, user and Framery. Whether it's about new features, calendar issues, updates or maintenance requests – everything can be handled remotely or digitally.

Color options



Powder Blue NCS 3421-R86B Ultramatt Sand NCS S 2010 - Y20R Ultramatt

Table

White Standard

Frames

Black

Blush NCS 2728-R01B Ultramatt

> Black Black laminate with anti-fingerprint surface

Winter Moss s 7010-G10Y Ultramatt

Oak Oak veneer

Mustard Select #62098 Gabriel Grape Select #61190 Gabriel

Rose Select #65117 Gabriel Green Select #68209 Gabriel

Technical specifications



Framery One features and options

- Colors
- 8 Exterior panel colors
- 4 Interior panel colors
- 8 Seat fabric colors
- 4 Carpet colors
- 3 Table colors
- Framery Connect
- Occupancy indicator .
- Wireless charger •
- Activated carbon filter •
- LAN •
- Movability kit •
- Seismic anchors



The adjustable work surface provides ample space for laptops, personal devices and other work tools. The electric height adjustable table can be positioned vertically between 70 - 120 cm (27,6 - 47,2 in) to allow for different working positions and provide comfort for all users.


	Measurements - cm	Measurements - in
Exterior	225,5 cm x 122 cm x 100 cm (height, width, depth)	88,8 in x 47,9 in x 40 in (height, width, depth)
Interior	204 cm x 102 cm x 93 cm (height, width, depth)	80,3 in x 40 in x 36,7 in (height, width, depth)
Door (left- and right-handed)	Doorway 204 cm x 101,5 cm (height, width)	Doorway 80,2 in x 40 in (height, width)
Table	76 cm x 45 cm (width, depth) Adjustment height 70 cm - 120 cm	30 in x 17,7 in (width, depth) Adjustment height 27,6 in - 47,2 in
Adjustable seat height	59 cm - 85 cm	23,2 in x 33,5 in

The door handedness can be changed on-demand with simple tools, by flipping the front frame in its place. No additional components are needed, should the customer want to have the door opening to the right instead of left.

UI panel Outlet High resolution touchscreen 1 power socket + USB C socket + optional LAN (extra cost)

Adjust airflow & brightness of the light according to your own preference from the touchscreen. See both the availability of the pod and/or book a reservation (by using the optional calendar integration) from your own laptop or phone or just walk in and the pod reserves itself automatically for you. Integrated 4G technology module enables three way communication between you, the pod and Framery. Whether it's about calendar reservation, pod maintenance, updates or notifications, all matters related to the Framery One pod are handled remotely (digitally).

	Features	
Exterior	Powder coated deep-drawn steel panels	
Interior	Replaceable interior panels made from PET sheets	
Glass	Sound control laminated glass	
Frames	Semi-gloss black frames made from steel & alumin	
Solid walls and floor	A sandwich element chassis, made of deep-drawn Fabric interior panels and an anti-static and stain	
Tabletop	Formica laminate on birch plywood with varnish	
Weight	357 kg / 787 lb	
Airflow	Maximum airflow is 29 l/s. (Minimum recommended space for the air to circu	
Acoustics	Speech level reduction (Ds.A) according to ISO 233	
	Power	
Power consumption	30 W while in use (Default) LED lights: 19 W Fans in total: 7 W Other components: 4 W 6 W standby power consumption Fans are working on 25 % of the maximum power	
Outlets	Always included Power socket + USB charger	

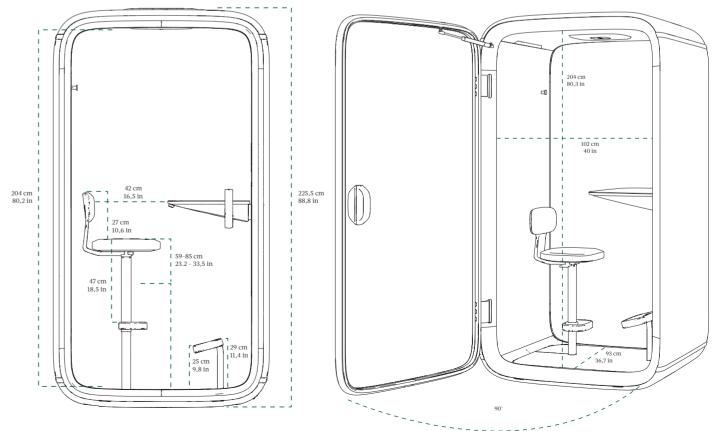

sheets which are laminated with polyester fabric

luminum

lrawn sheet metal & recycled acoustic foam. stain resistant low loop pile carpet for the floor.

nish trim

circulate is 5 cm / 1,9" on the sides - 20 cm / 8" above the pod.)

O 23351-1 testing method: >30 dB

Maximum power consumption: 80 W total LED light: 24 W Fans in total: 9 W USB C charger: 21 W Wireless charger: 12 W Other components: 14 W Input: 100-240 VAC, 10.0 A, 50-60 Hz Optional

Wireless charger LAN

,6 A, 50–60 Hz